

### Highlights:

---

- Parallel & separable wires
- 25 AWG stranded conductors
- Spiral shielding

### Product information:

---

The SIG series cables are high quality signal cables for indoor, fixed or mobile applications. They have a PVC jacket and are very easy to handle. The inner conductors are fitted with a durable shielding. This gives an excellent protection against interference of all kinds such as electromagnetic fields produced by dimmers, electric motors or power cables. The SIG series cables are "all-round" signal cables which are suited for all kinds of applications where reliable signal transmission is needed.



### Inner Conductors:

---



### Shielding:

---



Product Features:

Application	null		
Series	null		

Physical Characteristics:

Inner conductor	Insulation	Material	LDPE 1 mm (Ø)
		Colours	White / Red ; White / Blue
		Shielding	BC 32 x 0.12 mm (Ø) (OFC)
Outer jacket	Material	Flexible PVC 4 x 8 mm (Ø)	
		Colours	Black
Type of cable	25 AWG Stereo signal cable		
Inner conductor	Material	BC 2 x 14 x 0.12 mm (Ø) (OFC)	
		Section	0.00025 "²
		Number of conductors	2 x 2


Mechanical Characteristics:

Temperature range	Fixed installation	- 104 °F till + 176 °F
	Mobile installation	- 77 °F till + 158 °F
Bending radius	Fixed installation	6 x outer diameter
	Mobile installation	8 x outer diameter

Electrical Characteristics:

Capacitance	Cond/Cond	54 pF / m @ 1 kHz
	Cond/Shield	98 pF / m @ 1 kHz
Lead resistance		10.6 Ω / 100 m
Cable Crosstalk		Min. 73.3 dB / 100 m

Cross sections:

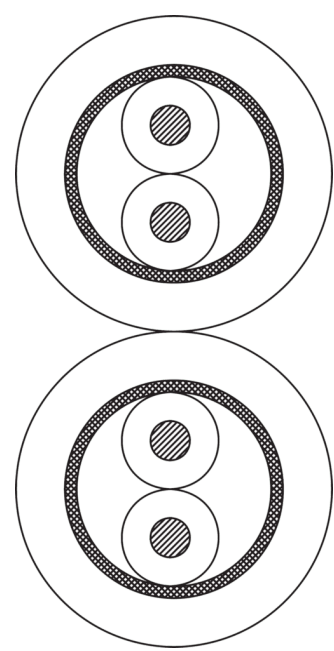

Variants:

- SIG58/1 - 100 meter
- SIG58/5 - 500 meter