


Highlights:

- null
- null
- null
- null
- null


Product information:

The PNC2527 is a hybrid power/network cable which consists of 3x 2,5mm² power section and 2 x CAT 7 LAN cable. As more and more equipment is network-based this cable is perfectly suited to provide the necessary power and redundant data to these devices. The power and 2x LAN cable each have a separate jacket which makes it easy to split out the cables at the end.

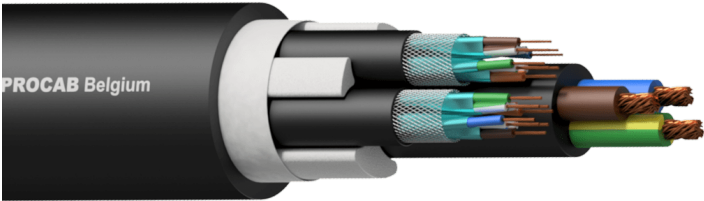

Components:

- CableType: HCT70S - CAT7 S/FTP networking cable
- CableType: HPC3G2.5 - 3G2.5 3 x 2.5 mm² PVC power cable



Certification:



Properties:



Product Features:

|             |      |
|-------------|------|
| Application | null |
| Series      | null |

Physical Characteristics:

|               |          |   |
|---------------|----------|---|
| Components    |          | 2 x HCT70S                                    |
|               |          | 1 x HPC3G2.5                                  |
| Outer jacket  | Material | Highflex PVC 20.9 mm (Ø)                      |
|               | Colours  | Black   |
| Type of cable |          | 2 x CAT7 S/FTP Networking & 3G2.5 Power cable |
| Filling       |          | Non-woven (PET/PA) tape                       |


Standards & regulations:

|                   |                                   |
|-------------------|-----------------------------------|
| RoHS2 compliant   | According EU Directive 2011/65/EU |
| Reach compliant   | According EC 1907/2006            |
| Flammability test | According EN 60332-1-2            |

Mechanical Characteristics:

|                   |                     |                       |
|-------------------|---------------------|-----------------------|
| Temperature range | Fixed installation  | - 59 °F till + 158 °F |
|                   | Mobile installation | - 41 °F till + 167 °F |
| Bending radius    | Fixed installation  | 8 x outer diameter    |
|                   | Mobile installation | 10 x outer diameter   |

Cross sections:



Variants:

- PNC2527/1 - 100 meter
- PNC2527/3 - 300 meter